


REVISIONS LIST				
REV	ECO #	DESCRIPTION	DATE	APV'D
A		Initial Release		

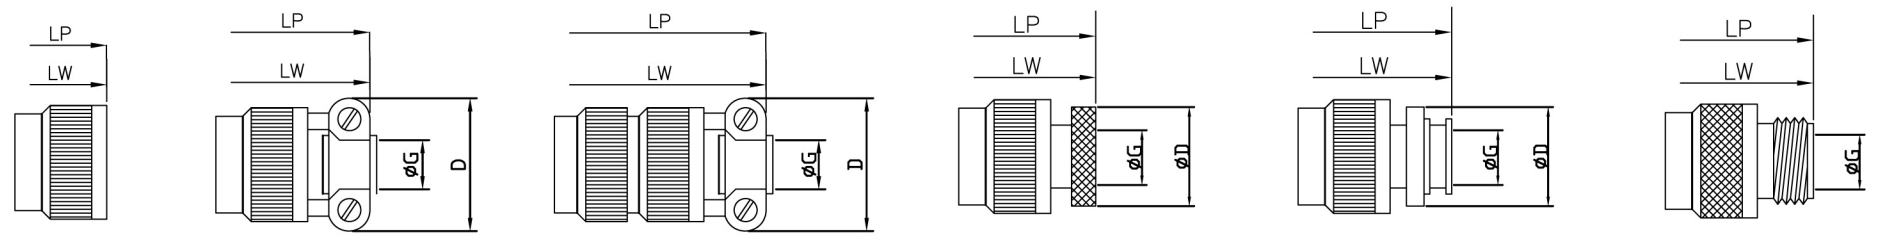

GROMMET SEAL WITH BACK NUT [E] GROMMET SEAL WITH STRAIN RELIEF [F] WATER TIGHT GLAND SEAL WITH STRAIN RELIEF FOR JACKETED WIRE [J] GROMMET SEAL WITH BACK SHELL FOR HEAT SHRINK [H] GROMMET SEAL WITH BACK SHELL FOR SCREEN TERMINATION [S] THREADED ADAPTOR SHELL FOR CABLE ACCESSORIES, EXPOSED SOLDER BUCKETS [T]

Shell Size	CLASS E		CLASS F				CLASS J				CLASS H				CLASS S				CLASS T		
	LP MAX	LW MAX	LP MAX	LW MAX	øG MIN	D MAX	LP MAX	LW MAX	øG MIN	D MAX	LP MAX	LW MAX	øG MAX	øD MAX	LP MAX	LW MAX	øG MAX	øD MAX	LP MAX	LW MAX	øG MAX
8	33.70	33.70	48.40	48.80	2.95	21.00	57.60	57.60	2.95	21.00	50.00	50.00	7.05	13.55	51.60	51.60	7.45	13.55	41.00	41.00	8.51
10	33.70	33.70	48.40	48.40	4.55	22.60	57.60	57.60	4.55	22.60	50.00	50.00	9.90	15.35	51.60	51.60	9.00	15.35	41.00	41.00	11.84
12	33.70	33.70	48.40	48.80	7.70	25.80	61.20	61.20	7.70	25.80	50.00	50.00	12.60	19.48	51.60	51.60	13.30	19.48	41.00	41.00	15.01
14	33.30	33.70	48.40	48.80	9.30	28.90	66.00	66.00	9.30	28.90	50.00	50.00	15.90	21.30	51.60	51.60	16.50	21.30	41.00	41.00	19.05
16	33.70	33.70	51.90	51.90	12.50	30.50	74.70	74.70	12.50	30.50	50.00	50.00	18.95	24.50	51.60	51.60	18.50	24.50	41.00	41.00	21.08
18	33.70	33.70	52.70	52.70	15.65	37.30	80.50	80.50	15.65	37.30	50.00	50.00	20.90	26.45	52.00	52.00	21.90	26.45	41.00	41.00	24.08
20	36.50	38.90	57.10	59.40	15.65	37.30	91.60	91.60	15.65	37.30	53.30	53.30	23.70	30.75	53.90	53.90	25.10	30.75	44.00	44.00	26.49
22	36.50	38.90	57.10	59.40	18.80	42.00	95.60	95.60	18.80	42.00	53.30	53.30	26.60	34.24	53.90	53.90	28.20	34.24	44.00	44.00	30.43
24	38.50	40.49	58.70	61.10	20.10	44.40	101.00	101.00	20.10	44.40	53.30	53.30	29.30	36.47	53.90	53.90	31.40	36.47	44.00	44.00	32.84

NOTE:
LP - Length of Plug with Respective Backshell
LW - Length of Receptacle with Respective Backshell
Backshells Are Also Available Separately Up[on Request

UNLESS NOTED TOLERANCES ARE: .X ± 0.38 .XX ± 0.25 ANGLES ± 1°	THIRD ANGLE PROJECTION 		1170 S. PATTON ST. XENIA, OHIO 45385 PH: (937) 374-2700 FX: (937) 374-2717

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SPI AND SHALL NOT BE COPIED, USED OR RE-PRODUCED WITHOUT PERMISSION.