


REVISIONS LIST				
REV	ECO #	DESCRIPTION	DATE	APV'D
A		Initial Release		

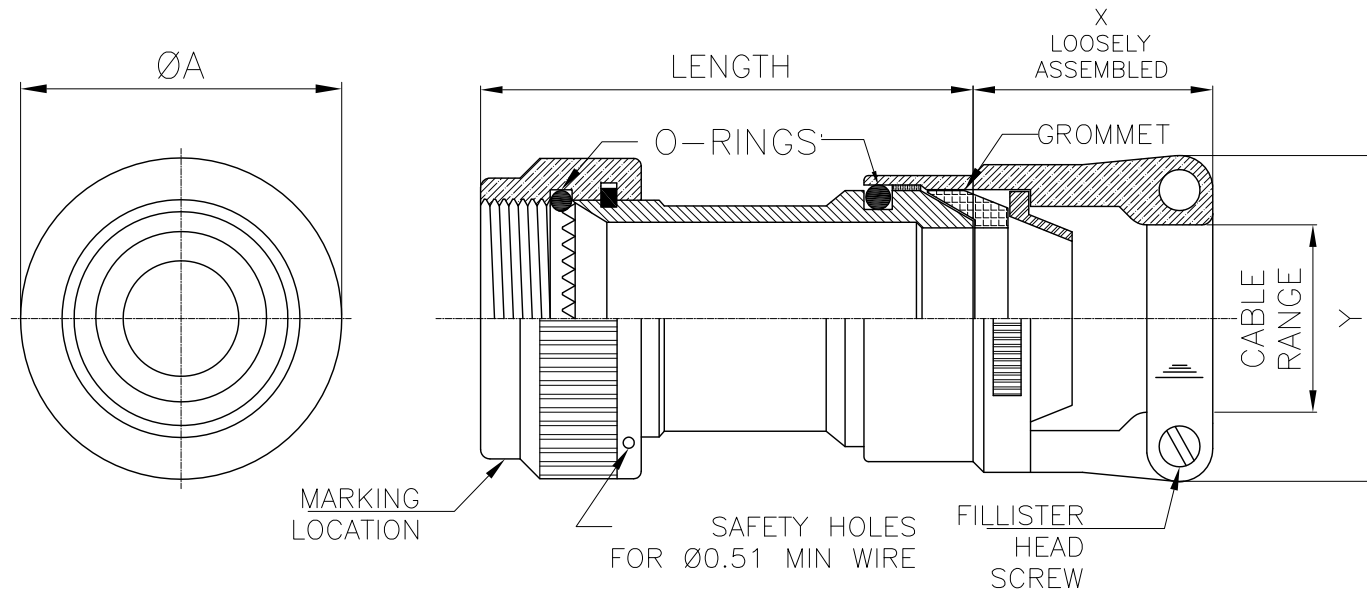

Shell Size	Clamp Size		A Max
	Min	Max	
08	01	02	.57 (14.5)
10	01	03	.70 (17.8)
12	02	04	.83 (21.1)
14	02	05	.95 (24.1)
16	02	06	1.08 (27.4)
18	03	07	1.20 (30.5)
20	03	08	1.33 (33.8)
22	03	09	1.45 (36.8)
24	04	10	1.58 (40.1)


Clamp Size	Cable Range		Y Max	X Max
	Min	Max		
01	.062 (1.57)	.125 (3.18)	.781 (19.84)	1.250 (31.75)
02	.125 (3.18)	.250 (6.35)	.969 (24.61)	
03	.250 (6.35)	.375 (9.53)	1.062 (26.97)	
04	.375 (9.53)	.500 (12.70)	1.156 (29.36)	
05	.500 (12.70)	.625 (15.88)	1.250 (31.75)	1.312 (33.32)
06	.625 (15.88)	.750 (19.05)	1.375 (34.93)	1.375 (34.93)
07	.750 (19.05)	.875 (22.23)	1.500 (38.10)	1.500 (38.10)
08	.875 (22.23)	1.000 (25.40)	1.625 (41.28)	1.625 (41.28)
09	1.000 (25.40)	1.125 (28.58)	1.750 (44.45)	
10	1.125 (28.58)	1.250 (31.75)	1.875 (47.63)	

Code	Length ±.032 (0.81)
Standard	1.50 (38.1)
A	2.50 (63.5)
B	3.50 (88.9)
C	4.50 (114.3)

No.	Name	Material/Finish	Remarks
1	Shell	Aluminum	
2	Fastners	Stainless Steel	Passivated
3	O-Rings	Silicone Rubber	
4	Grommet	Silicone Rubber	

UNLESS NOTED
TOLERANCES ARE:
.X ± 0.38
.XX ± 0.25
ANGLES ± 1°

THIRD ANGLE
PROJECTION



1170 S. PATTON ST.
XENIA, OHIO 45385
PH: (937) 374-2700
FX: (937) 374-2717

UNIT: mm	DRWN: RLM	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SPI AND SHALL NOT BE COPIED, USED OR RE-PRODUCED WITHOUT PERMISSION.	TITLE Military Back Shell	
SCALE: NTS	DATE: 08/02/22		S P I P / N : M85049/17-XXXX	
	CHK'D: TRH		REV: A	
SHEET: 1 OF 1	APV'D: TRH		CUSTOMER P / N :	