

SPECIFICATIONS:


Cable Range: 1.003"–1.145" (25.48–29.08)

Salt Spray: 500 Hours

Cable Pull Out Strength: 250 Lbs for 1 Hour

MIL-DTL-22992 QPL Qualified

| REVISIONS LIST |       |                 |      |       |
|----------------|-------|-----------------|------|-------|
| REV            | ECO # | DESCRIPTION     | DATE | APV'D |
| A              |       | Initial Release |      |       |

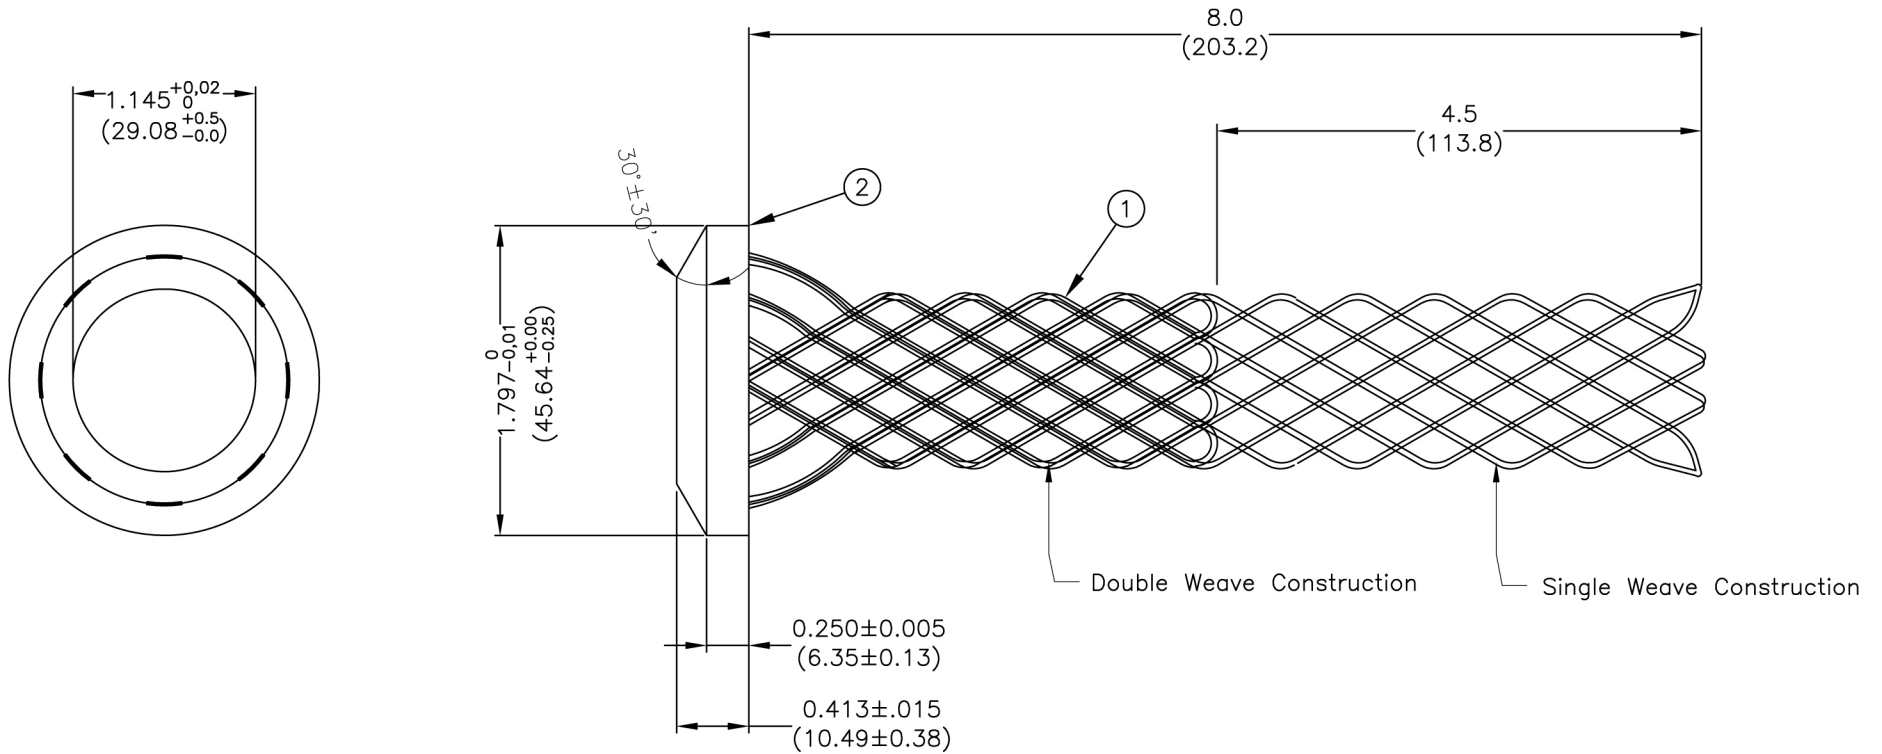


NOTES:

All Measurements Are In Inches (mm)

| No. | Name | Material/Finish     | Remarks   |
|-----|------|---------------------|-----------|
| 1   | Wire | 304 Stainless Steel | 1X7X1.0mm |
| 2   | Ring | 304 Stainless Steel |           |

UNLESS NOTED TOLERANCES ARE:  
 .X ± 0.15 (0.38)  
 .XX ± 0.10 (0.25)  
 ANGLES ± 1°



1170 S. PATTON ST.  
 XENIA, OHIO 45385  
 PH: (937) 374-2700  
 FX: (937) 374-2717

|               |                |  |                   |        |
|---------------|----------------|--|-------------------|--------|
| UNIT: In (mm) | DRWN: RLM      | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SPI AND SHALL NOT BE COPIED, USED OR RE-PRODUCED WITHOUT PERMISSION. | TITLE             |        |
| SCALE: NTS    | DATE: 12/14/09 |  | Class L Cord Grip |        |
|               | CHK'D: RLM     |  | SPIP/N: MS90561-2 | REV: A |
| SHEET: 1 OF 1 | APV'D: RLM     |  | CUSTOMER P/N:     |        |