


REVISIONS LIST				
REV	ECO #	DESCRIPTION	DATE	APV'D
A		Initial Release		

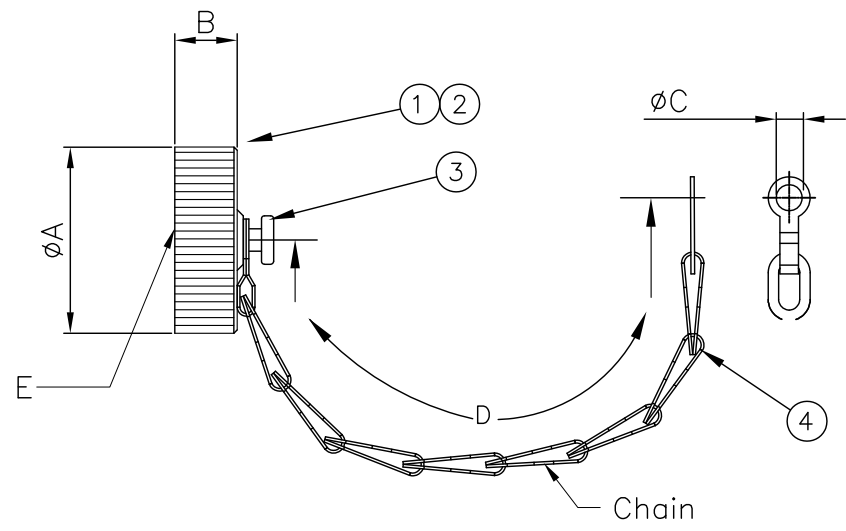

**SPECIFICATIONS**

Environmental

Operating Temperature (Max)	+125°C
Salt Spray	
Electrophoresis Green (Non-Conductive)	96 Hrs
Electroless Nickel (Conductive)	48 Hrs

Shell Size	$\phi A$ $\pm 2.0$	B $\pm 1.0$	$\phi C$ $+0.3/0.0$	D $\pm 10.0$	E Thread (UNEF2B)
10	21.0	11.7	3.8	115.0	0.625-24
14	28.0	11.7	3.8	115.0	0.875-20
16	30.0	11.7	3.8	115.0	1.000-20
18	34.0	11.7	3.8	115.0	1.125-18
20	37.0	11.7	3.8	140.0	1.250-18
22	40.0	11.7	3.8	140.0	1.375-18
24	43.0	11.7	3.8	140.0	1.500-18
28	50.0	13.4	3.8	200.0	1.750-18
32	56.5	13.4	3.8	200.0	2.000-18
36	63.0	13.4	3.8	200.0	2.250-16
40	69.0	13.4	3.8	200.0	2.500-16

No.	Name	Material/Finish	Remarks
1	Shell	Aluminum	
2	Seal	Neoprene (NBR)	
3	Fastener	Stainless Steel	
4	Chain & End	Stainless Steel	

UNLESS NOTED TOLERANCES ARE: .X $\pm 0.38$ .XX $\pm 0.25$ ANGLES $\pm 1^\circ$	THIRD ANGLE PROJECTION 	 1170 S. PATTON ST. XENIA, OHIO 45385 PH: (937) 374-2700 FX: (937) 374-2717
---	----------------------------	---

UNIT: mm	DRWN: RLM	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF  AND SHALL NOT BE COPIED, USED OR RE-PRODUCED WITHOUT PERMISSION.	TITLE Commercial 5015 Protective Cover Receptacle	
SCALE: NTS	DATE: 11/10/17		S P I P / N : S-MS25043-XX-XX	
	CHK'D: TRH		REV: A	
SHEET: 1 OF 1	APV'D: TRH		CUSTOMER P / N:	