


REVISIONS LIST				
REV	ECO #	DESCRIPTION	DATE	APV'D
A		Initial Release		

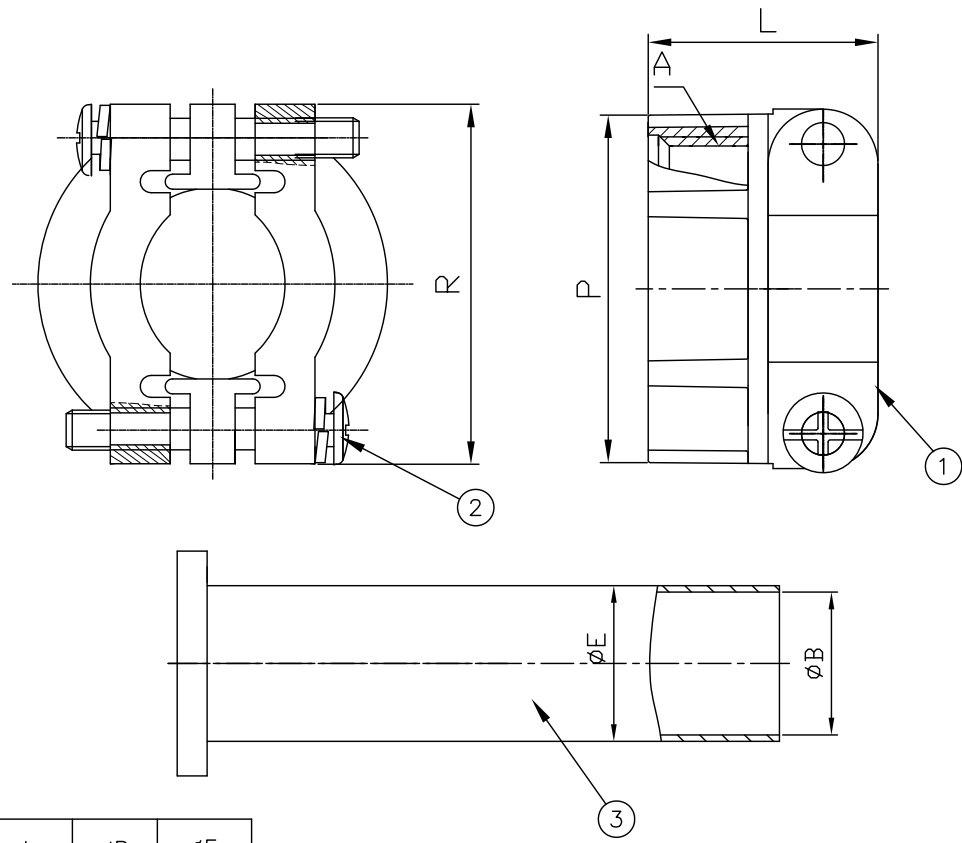

Shell Size	A Thread (Class: 2B)	P ±0.80	R ±0.80	L ±0.80	øB ±0.50	øE ±0.50
10S, 10SL (-4A)	0.625-24	20.6	22.2	20.6	5.5	7.5
14S (-6A)	0.750-20	24.6	27.0	22.2	7.9	11.1
16S, 16 (-8A)	0.875-20	27.8	29.4	23.8	11.1	14.3
18 (-10A)	1.000-20	30.2	31.8	23.8	14.3	16.0
20, 22 (-12A)	1.1875-18	34.9	37.3	23.8	15.9	19.1
24, 28 (-16A)	1.4375-18	42.1	42.9	26.2	19.0	23.8
32 (-20A)	1.750-18	50.8	51.5	27.5	23.8	31.2
36 (-24A)	2.000-18	56.4	58.0	29.4	31.8	34.7
40 (-28A)	2.250-18	67.0	68.3	42.9	35.0	41.0

No.	Name	Material/Finish	Remarks
1	Shell	Aluminum	
2	Screw	Stainless Steel	
3	Seal	Neoprene	

UNLESS NOTED TOLERANCES ARE: .X ± 0.38 .XX ± 0.25 ANGLES ± 1°	THIRD ANGLE PROJECTION		1170 S. PATTON ST. XENIA, OHIO 45385 PH: (937) 374-2700 FX: (937) 374-2717
UNIT : mm SCALE : NTS SHEET : 1 OF	DRWN : RLM DATE : 01/11/18 CHK'D : TRH APV'D : TRH	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SPI AND SHALL NOT BE COPIED, USED OR RE-PRODUCED WITHOUT PERMISSION.	TITLE Commercial 5015 Strain Relief with Rubber Bushing SPI P / N : S-MS3057A-XX-XX CUSTOMER P / N :

REV : A