REVISIONS LIST				
REV	ECO #	DESCRIPTION	DATE	APV'D
A		Initial Release		

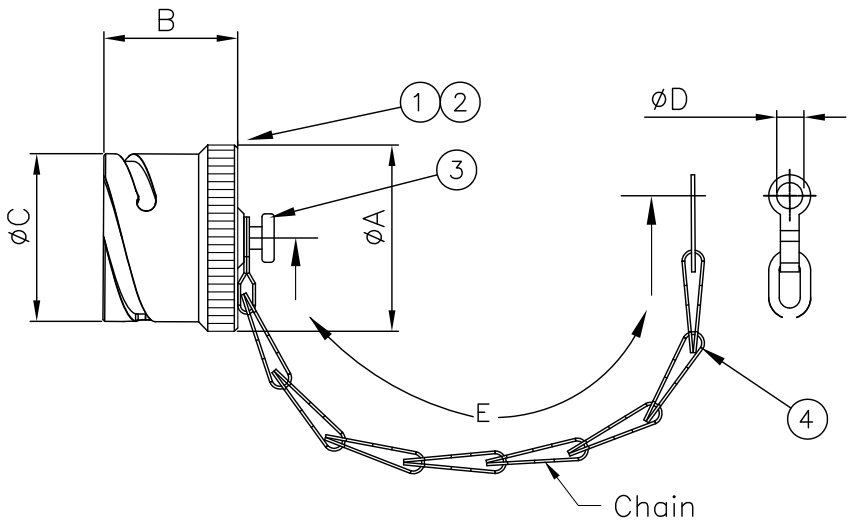

SPECIFICATIONS

Environmental

Operating Temperature (Max)	+125°C
Salt Spray	
Electrophoresis Green (Non-Conductive)	96 Hrs
Electroless Nickel (Conductive)	48 Hrs

Shell Size	øA ±2.0	B ±2.0	øC ±2.0	øD +0.2/ 0.0	E ±10.0
10	20.0	25.0	18.1	3.8	115.0
14	27.0	25.0	24.5	3.8	115.0
16	29.0	25.0	27.3	3.8	115.0
18	33.0	30.0	30.7	3.8	115.0
20	36.0	30.0	34.1	3.8	140.0
22	39.0	30.0	37.3	3.8	140.0
24	43.0	30.0	40.8	3.8	140.0
28	48.5	30.0	46.6	3.8	200.0
32	55.5	30.0	53.3	3.8	200.0
36	61.5	30.0	59.5	3.8	200.0
40	67.5	30.0	65.4	3.8	200.0

No.	Name	Material/Finish	Remarks
1	Shell	Aluminum	
2	Seal	Neoprene (NBR)	
3	Fastener	Stainless Steel	
4	Chain & End	Stainless Steel	

UNLESS NOTED TOLERANCES ARE:
.X ± 0.38
.XX ± 0.25
ANGLES ± 1°

THIRD ANGLE PROJECTION

SPI CONNECTS
1170 S. PATTON ST.
XENIA, OHIO 45385
PH: (937) 374-2700
FX: (937) 374-2717

UNIT: mm
SCALE: NTS
SHEET: 1 OF 1

DRWN: RLM
DATE: 01/25/18
CHK'D: TRH
APV'D: TRH

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SPI AND SHALL NOT BE COPIED, USED OR RE-PRODUCED WITHOUT PERMISSION.

TITLE
Commercial 5015
Reverse Bayonet Protective Plug Cover

SPI P/N: S-MS45042-XX-XX REV: A

CUSTOMER P/N: