


SPECIFICATIONS:

Cable Range: 2.211"–2.500" (56.16–63.50)
 Salt Spray: 500 Hours
 Cable Pull Out Strength: 250 Lbs for 1 Hour
 MIL-DTL-22992 QPL Qualified

| REVISIONS LIST | | | | |
|----------------|-------|-----------------|------|-------|
| REV | ECO # | DESCRIPTION | DATE | APV'D |
| A | | Initial Release | | |

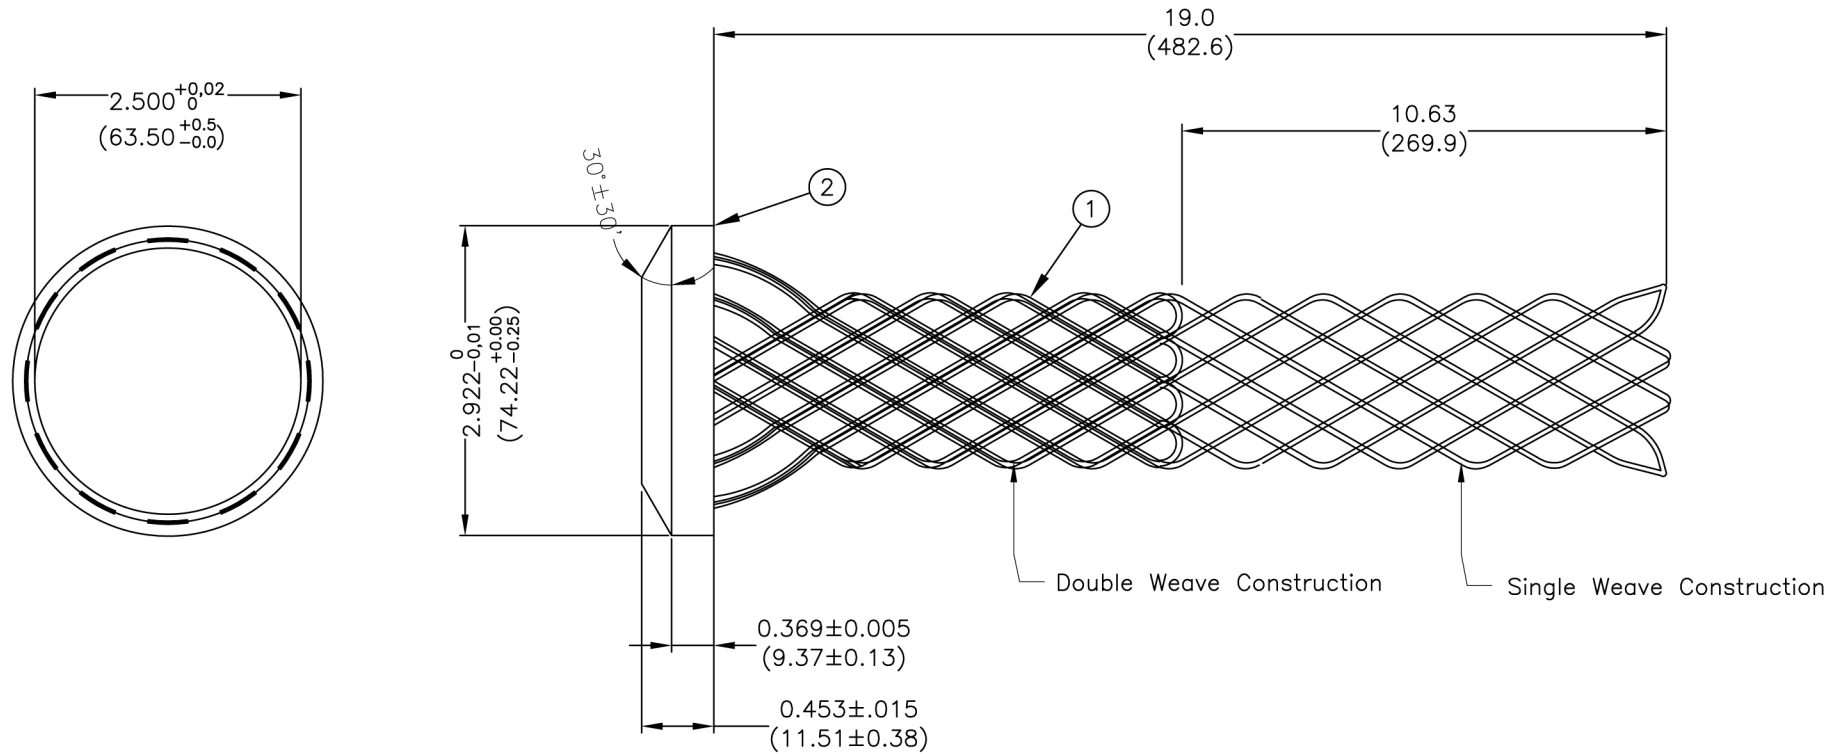

NOTES:

All Measurements Are In Inches (mm)

| No. | Name | Material/Finish | Remarks |
|-----|------|---------------------|------------|
| 1 | Wire | 304 Stainless Steel | 1X7X1.25mm |
| 2 | Ring | 304 Stainless Steel | |

| | | | |
|--|----------------------------|--|---|
| UNLESS NOTED TOLERANCES ARE: .X ± 0.15 (0.38) .XX ± 0.10 (0.25) ANGLES ± 1' | THIRD ANGLE PROJECTION | | 1170 S. PATTON ST. XENIA, OHIO 45385 PH: (937) 374-2700 FX: (937) 374-2717 |
|--|----------------------------|--|---|

| | | | | |
|---------------|----------------|---|----------------------------|--|
| UNIT: In (mm) | DRWN: RLM | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SPI AND SHALL NOT BE COPIED, USED OR RE-PRODUCED WITHOUT PERMISSION. | TITLE Class L Cord Grip | |
| SCALE: NTS | DATE: 12/14/09 | | S P I P / N : MS90561-18 | |
| | CHK'D: RLM | | R E V : A | |
| SHEET: 1 OF 1 | APV'D: RLM | | C U S T O M E R P / N : | |